

Safety instructions

Important! Before commencing installation work disconnect the main cable from the power supply - remove fuse or turn switch to "OFF"!

1. Installation should be carried out in accordance with the local safety regulations.
2. The integrated LED must be replaced by a professional.
3. In order to prevent damage, please check walls for cables before drilling holes.
4. Please ensure that all electrical connections (even preassembled lamps) are screwed tightly or are fully inserted as good contact is essential for a long life-span at high currents. Please check for tight connections after changing or adjusting lamps. Screwed connections must be tightened after 20 minutes.
5. Please do not place objects on your system (e.g. for decorative purposes) if they were not delivered with the system.
6. The lamps get very hot when in use. Please allow lamps to cool down before touching.
7. Do not change lamps or spots when switched on.
8. System should not be enlarged with additional lamps.
9. Use of a dimmer is highly recommended. Dimmer must be compatible with type of bulb.
10. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
11. The glass used for this lamp is hand-blown. Only 1st. quality has been chosen. Air bubbles and variations in thickness and colour is normal.
12. We reserve the right to make technical alterations.


Please keep these instructions.

Fitting: Integrated LED

2022-02-14 EU


Blossi Wall/Ceiling

Assembly Instructions

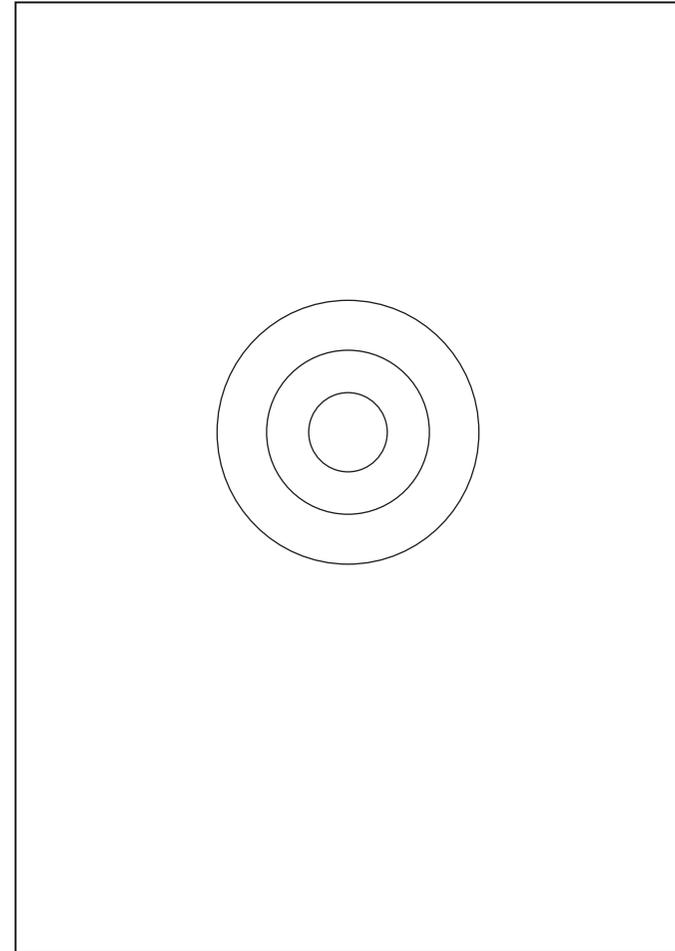


NUURA

www.nuura.com
info@nuura.com




NUURA


© 2018 All rights reserved

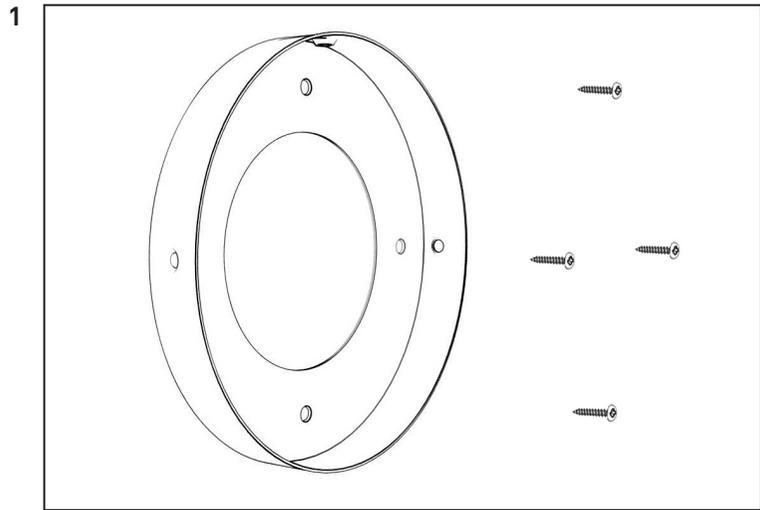


Mount the mounting plate to the wall or ceiling. Please make sure it is fixated properly.

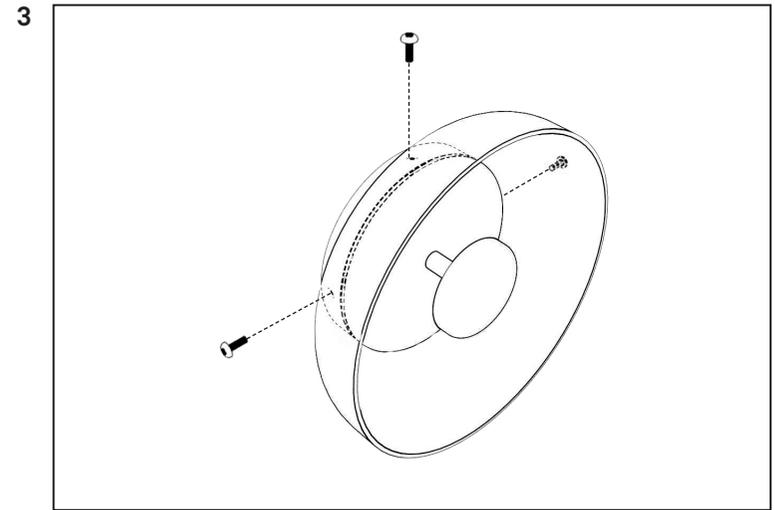

Secure the light fixture with the 3 screws.

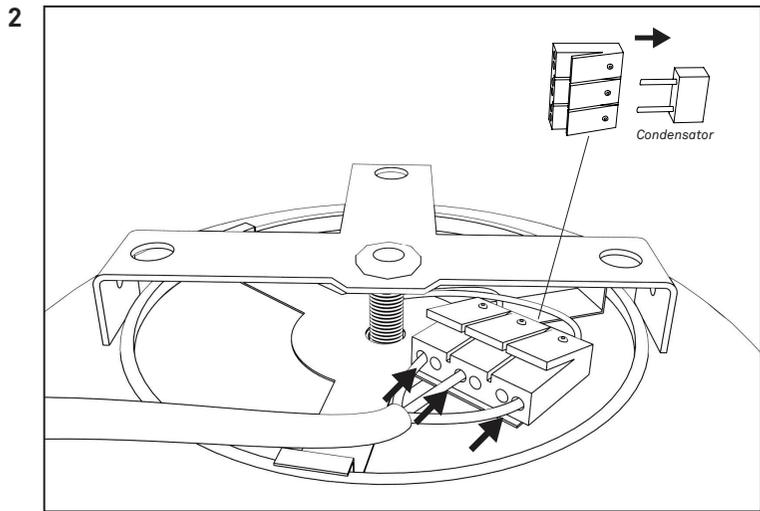

Install the power cable by leading it into the cable connector.
NB: If you plan to use a dimmer please remove the condensator from the cable connector to avoid double resistance.

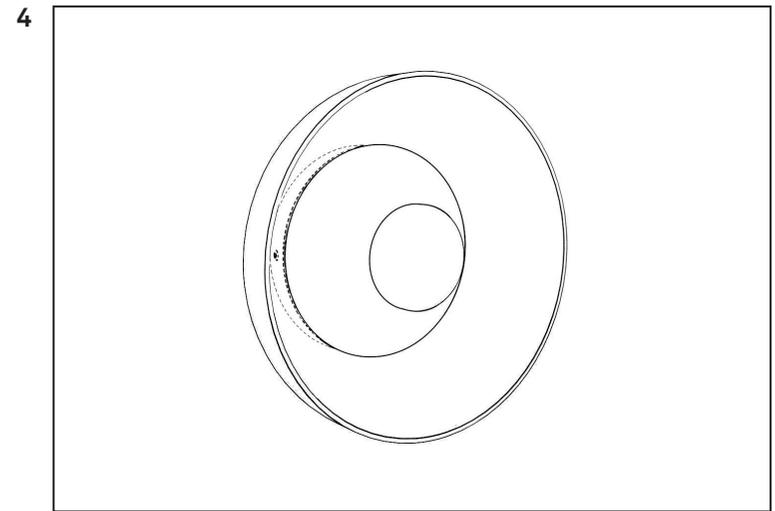

Completed.

Safety instructions

Important! Before commencing installation work disconnect the main cable from the power supply - remove fuse or turn switch to "OFF"!


1. Installation should be carried out in accordance with the local safety regulations.
2. In order to prevent damage, please check walls for cables before drilling holes.
3. Please ensure that all electrical connections (even preassembled lamps) are screwed tightly or are fully inserted as good contact is essential for a long life-span at high currents. Please check for tight connections after changing or adjusting lamps. Screwed connections must be tightened after 20 minutes.
4. Please do not place objects on your system (e.g. for decorative purposes) if they were not delivered with the system.
5. The lamps get very hot when in use. Please allow lamps to cool down before touching.
6. Do not change lamps or spots when switched on.
7. System should not be enlarged with additional lamps.
8. Use of a dimmer is highly recommended. Dimmer must be compatible with type of bulb.
9. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
10. The glass used for this lamp is hand-blown. Only 1st. quality has been chosen. Air bubbles and variations in thickness and colour is normal.
11. We reserve the right to make technical alterations.

Please keep these instructions.

2021-06-28 EU

Blossi Wall

Replace LED-module Instructions

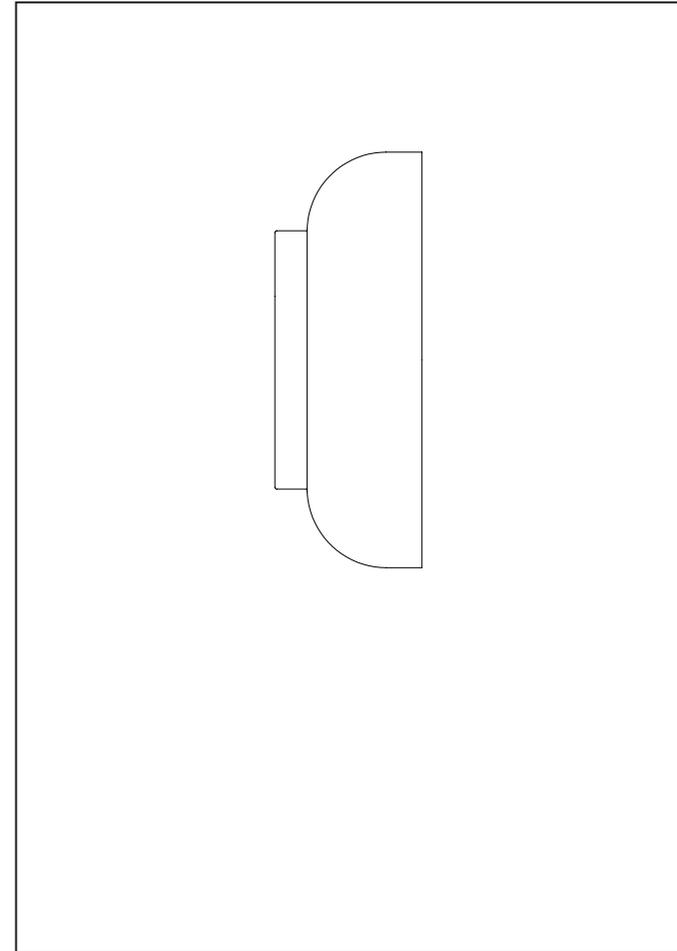

NUURA


www.nuura.com
info@nuura.com

© 2018 All rights reserved

CE


NUURA

© 2018 All rights reserved

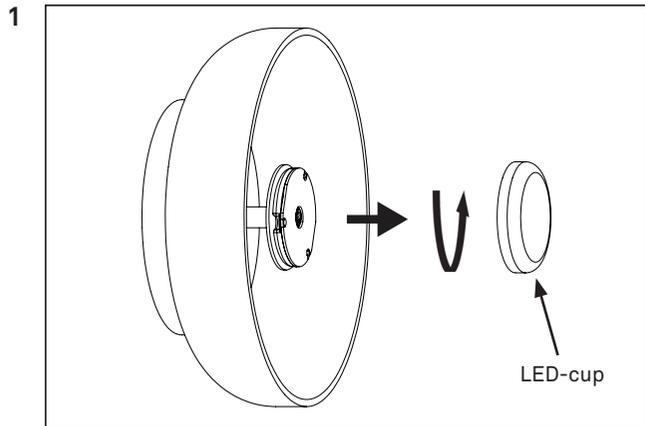

NB: Please turn off the power for the lamp by removing the fuse or turn the main switch to OFF!


Screw off the LED-cup by turning counterclock-wise.

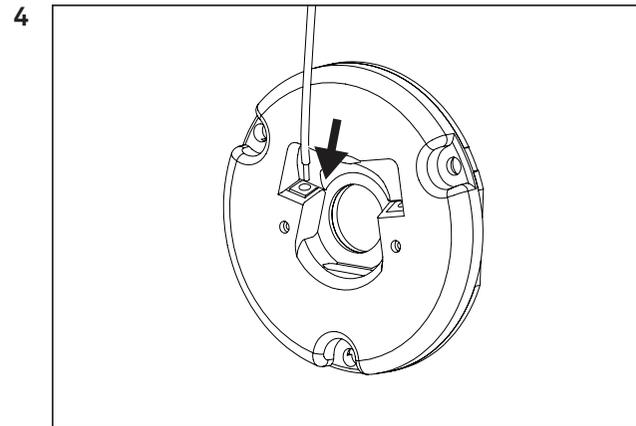

Make sure the cable goes through the diffuser and distance ring.


Press the cable into the cable terminal on the new LED-module. Make sure the cable is attached.

Do this for both cables.

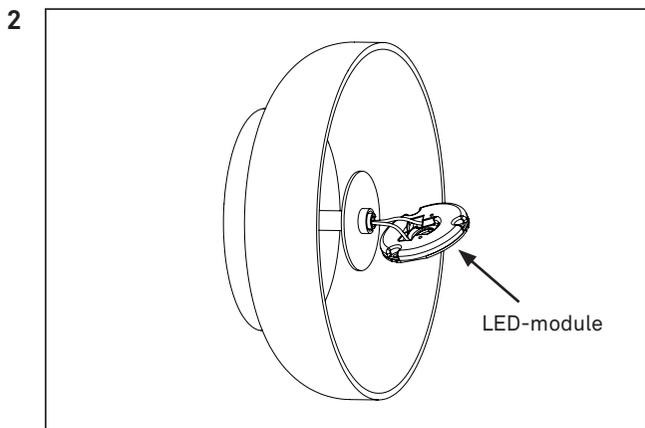


The LED-panel should hang in two wires.

Be careful the diffuser and distance ring might fall when doing the next step. This should be avoided!

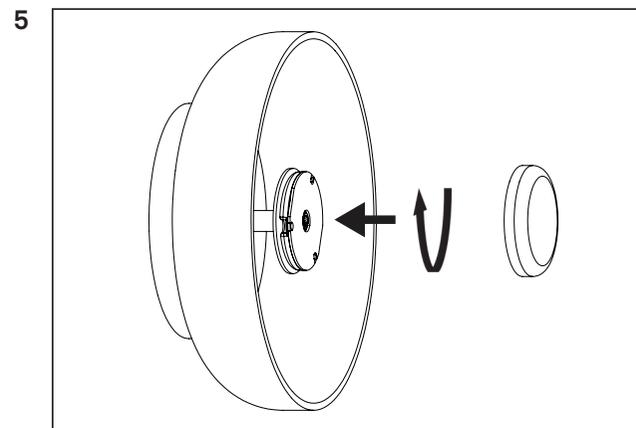

Press the diffuser, distance ring and LED-module over the threaded tube and secure it by screwing on the LED-cup.

Completed.

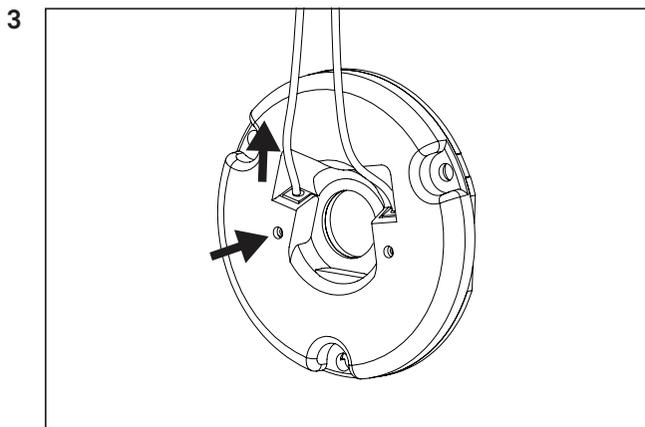

By using a pointy object or a small screwdriver push in the cable terminal and pull the cable to release.

Repeat for the other cable