

Safety instructions

Important! Before commencing installation work disconnect the main cable from the power supply - remove fuse or turn switch to "OFF"!

1. Installation should be carried out in accordance with the local safety regulations.
2. The integrated LED must be replaced by a professional.
3. In order to prevent damage, please check walls for cables before drilling holes.
4. Please ensure that all electrical connections (even preassembled lamps) are screwed tightly or are fully inserted as good contact is essential for a long life-span at high currents. Please check for tight connections after changing or adjusting lamps. Screwed connections must be tightened after 20 minutes.
5. Please do not place objects on your system (e.g. for decorative purposes) if they were not delivered with the system.
6. The lamps get very hot when in use. Please allow lamps to cool down before touching.
7. Do not change lamps or spots when switched on.
8. System should not be enlarged with additional lamps.
9. Use of a dimmer is highly recommended. Dimmer must be compatible with type of bulb.
10. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
11. The glass used for this lamp is hand-blown. Only 1st. quality has been chosen. Air bubbles and variations in thickness and colour is normal.
12. We reserve the right to make technical alterations.


Please keep these instructions.

Fitting: Integrated LED

2022-02-14 EU


Blossi 8

Assembly Instructions

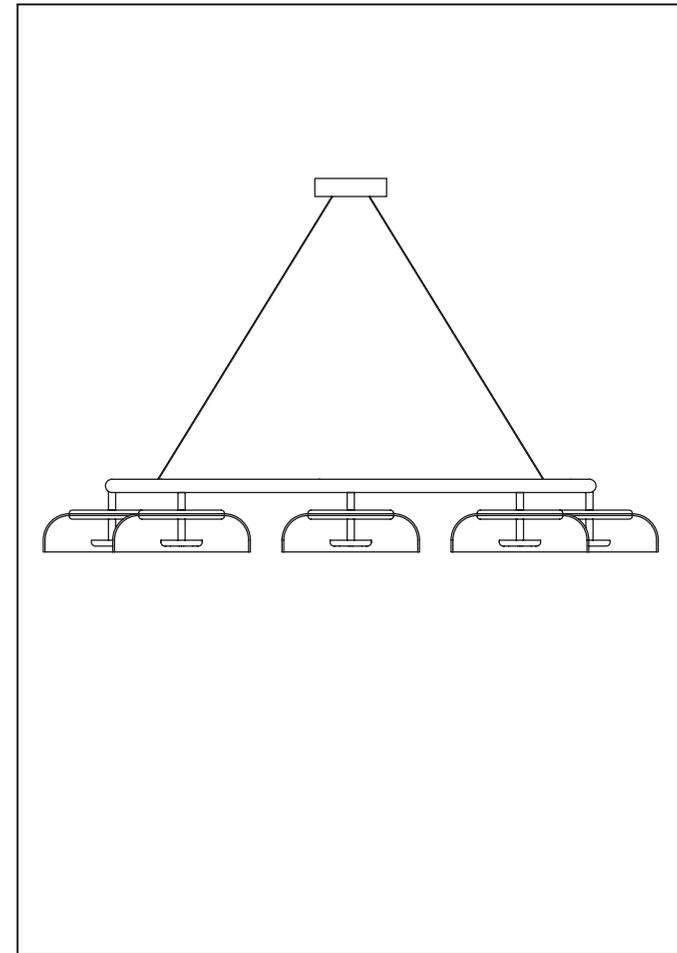


NUURA

www.nuura.com
info@nuura.com



NUURA


© 2018 All rights reserved

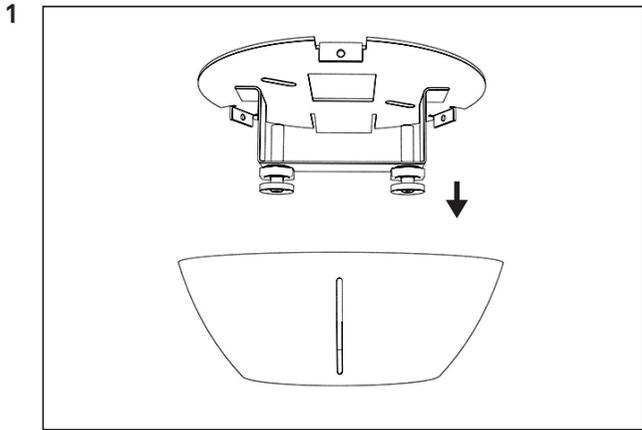

Remove the cover plate from the mounting plate by pulling them apart by hand.


Please note that cover plate is fixed to the mounting plate via strong magnets.

NB: Do not use tools as they can scratch the cover plate.

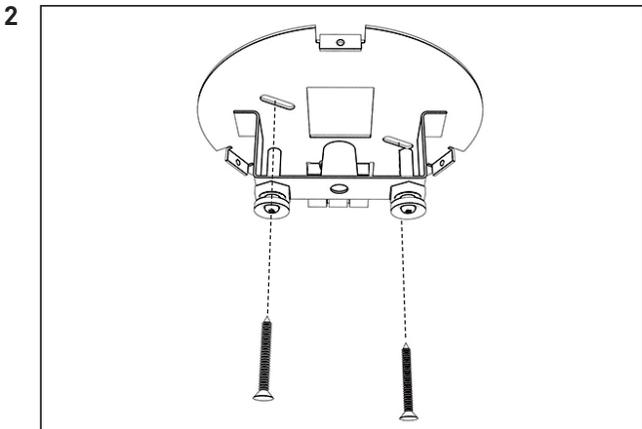


Fixate the mounting plate to the ceiling with screws.


Please make sure it is fixated properly.

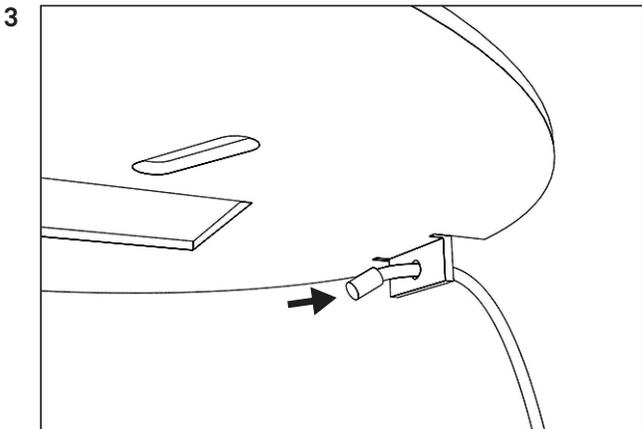

Lead the three wires through the holes in the mounting plate.

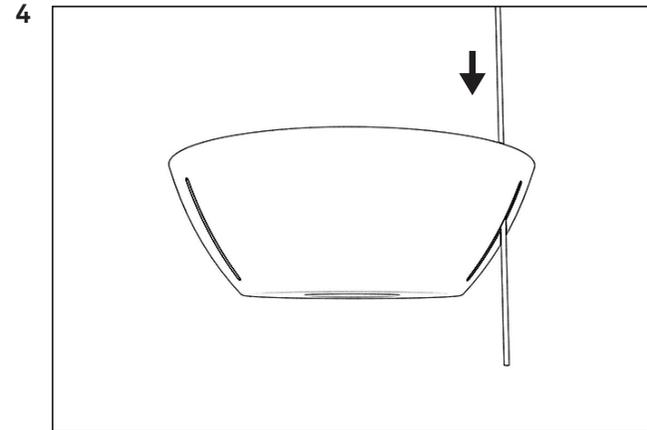


Lead the wires through the top of the cover plate.

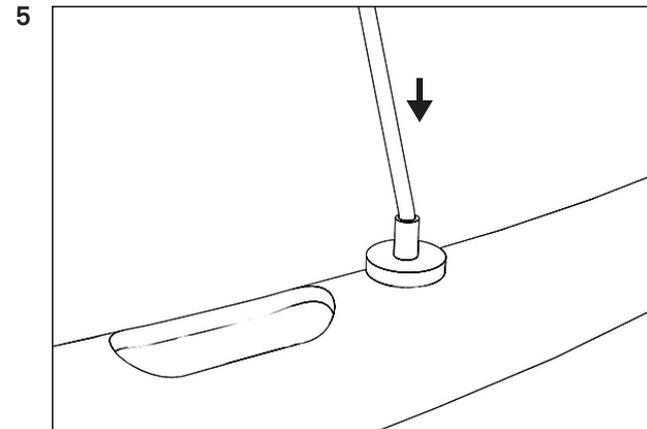

Lead the wires through the three wire locks on the ring. The locks will automatically keep the wires in place.


Adjust the chandelier until the desired height is reached.

NB: Make sure to keep a distance between the mounting plate magnets and the cover plate.

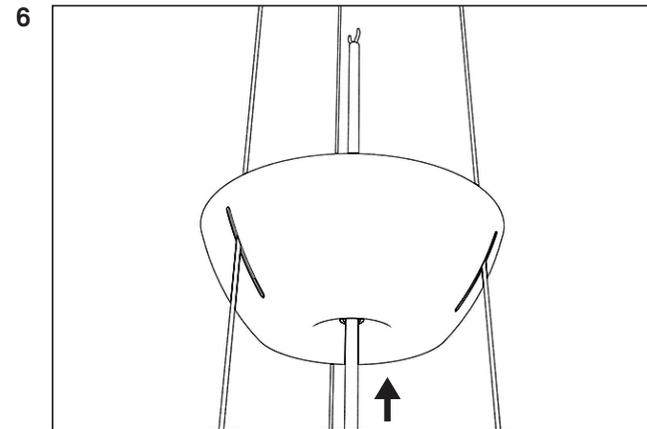

Lead the cable through the bottom of the cover plate.


Cut it to desired length.

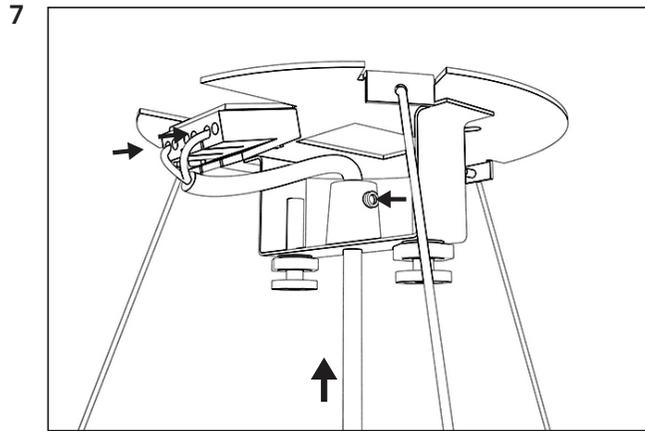

7 Lead the cables through the cable relief and fixate the cable by carefully turning the screw clockwise.


Lead the ends of the cables into the cable connector. Place the brown wire-end in one of the two holes in "L", place the blue wire-end in one of the two holes in "N"

Connect the power cable in the same manner.

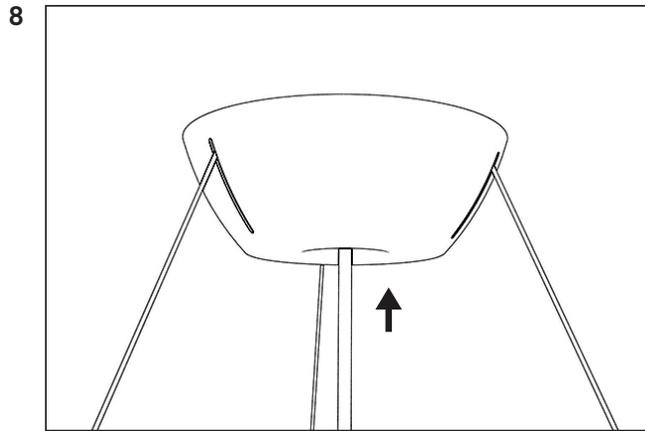


8 Attach the cover plate to the mounting plate by carefully sliding cover plate up and let the magnets fixate it.

NB: Place your hands on the side or bottom of the cover plate, when sliding it up towards the mounting plate.

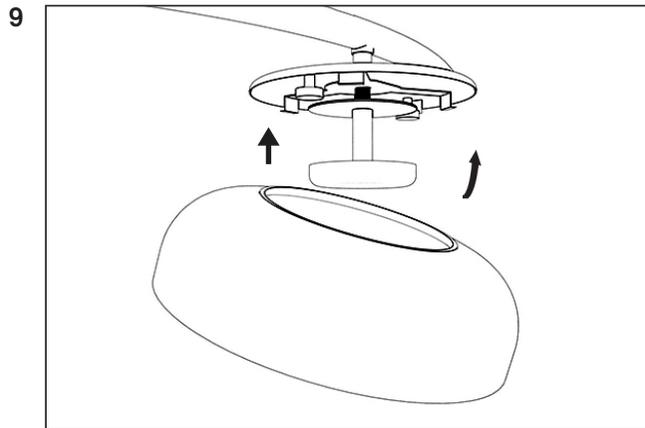

9 Attach each glass by fixating them with the three hooks located inside each of the 8 lamps.

Please make sure the glass is properly fixated before continuing.

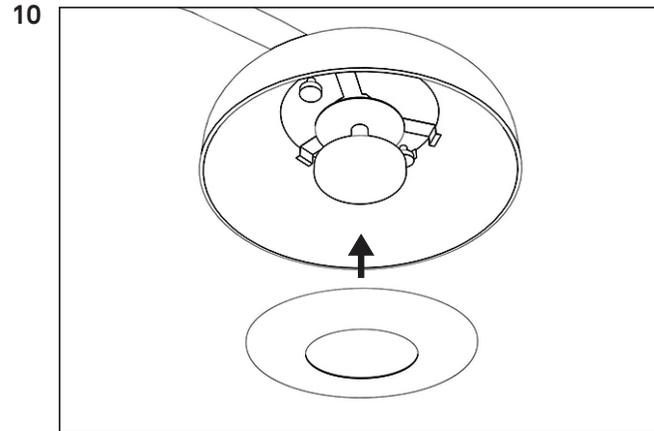

10 Attach the inner plate by carefully sliding it up and let the magnets fixate the plate to the lamp.

NB: Place your hands on bottom of the plate, when sliding it up towards the lamp.

Safety instructions

Important! Before commencing installation work disconnect the main cable from the power supply - remove fuse or turn switch to "OFF"!


1. Installation should be carried out in accordance with the local safety regulations.
2. In order to prevent damage, please check walls for cables before drilling holes.
3. Please ensure that all electrical connections (even preassembled lamps) are screwed tightly or are fully inserted as good contact is essential for a long life-span at high currents. Please check for tight connections after changing or adjusting lamps. Screwed connections must be tightened after 20 minutes.
4. Please do not place objects on your system (e.g. for decorative purposes) if they were not delivered with the system.
5. The lamps get very hot when in use. Please allow lamps to cool down before touching.
6. Do not change lamps or spots when switched on.
7. System should not be enlarged with additional lamps.
8. Use of a dimmer is highly recommended. Dimmer must be compatible with type of bulb.
9. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
10. The glass used for this lamp is hand-blown. Only 1st. quality has been chosen. Air bubbles and variations in thickness and colour is normal.
11. We reserve the right to make technical alterations.

Please keep these instructions.

2021-06-28 EU

Blossi 8

Replace LED-module Instructions

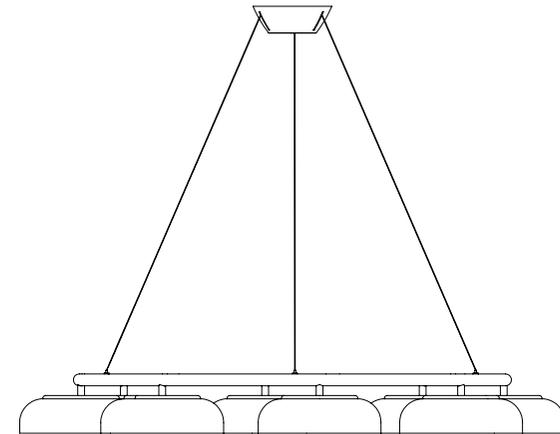

NUURA


www.nuura.com
info@nuura.com

© 2018 All rights reserved

CE


NUURA

© 2018 All rights reserved

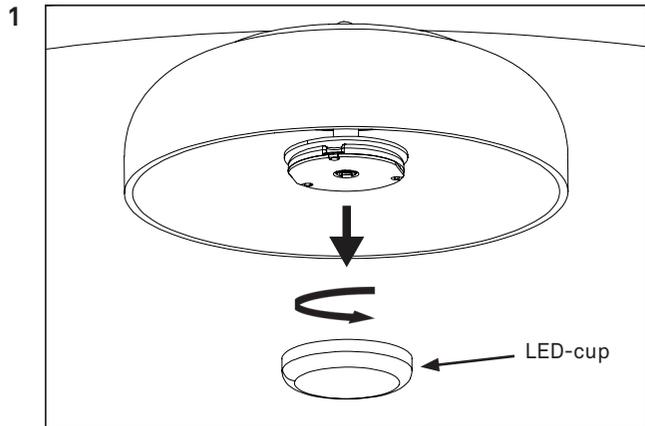


NB: Please turn off the power for the lamp by removing the fuse or turn the main switch to OFF!

Screw off the LED-cup by turning counterclock-wise.

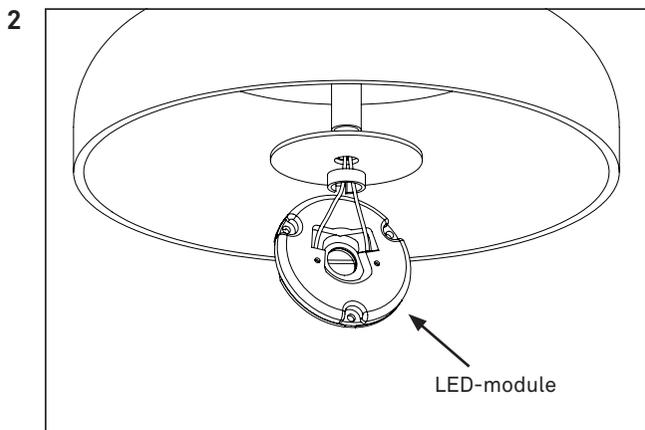


The LED-panel should hang in two wires.

Be careful the diffuser and distance ring might fall when doing the next step. This should be avoided!

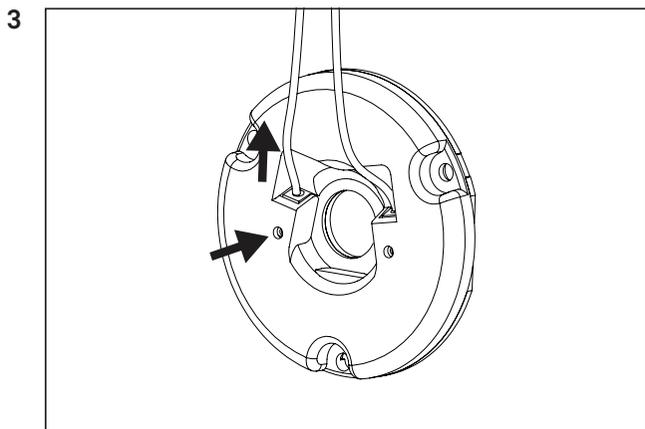

By using a pointy object or a small screwdriver push in the cable terminal and pull the cable to release.


Repeat for the other cable

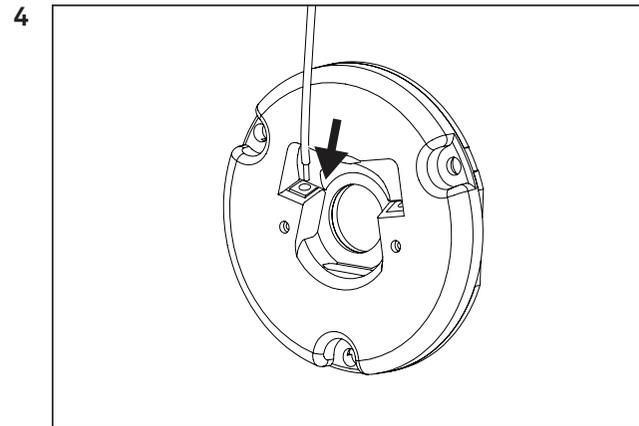

Make sure the cable goes through the diffuser and distance ring.

Press the cable into the cable terminal on the new LED-module. Make sure the cable is attached.

Do this for both cables.

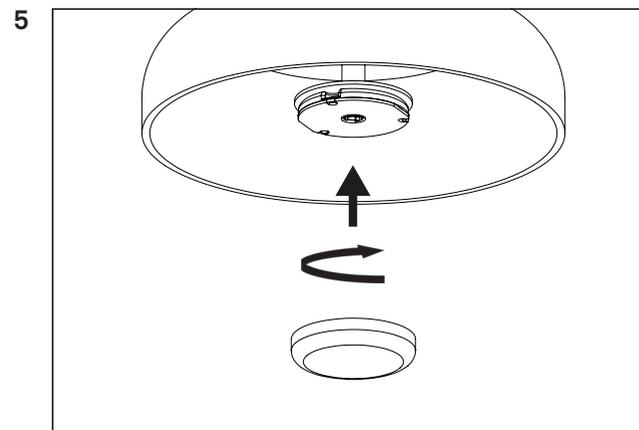

Press the diffuser, distance ring and LED-module over the threaded tube and secure it by screwing on the LED-cup.

Completed.