


NUURA

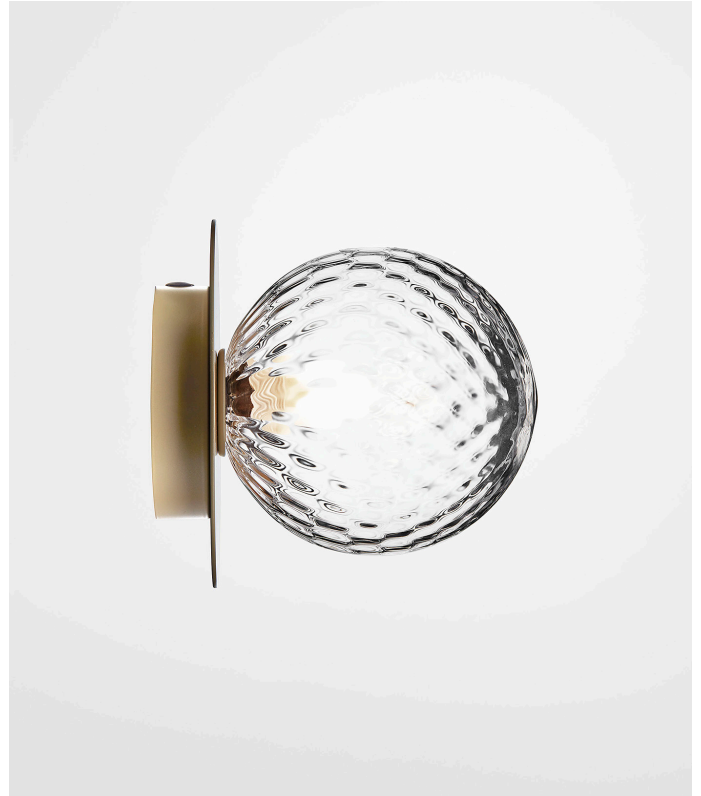

LIILA 1 MEDIUM WALL/CEILING - Optic

Design: Sofie Refer, 2018. EU-model.

Liila 1 Wall/Ceiling in mouth blown Optic Clear glass and Nordic Gold finish.

Liila Collection has a Nordic simplistic yet sensuous look due to the fine reflections in the glass and metal. The mouth blown glass is elegantly framed by the metal disc in soft metallic finish.


While the version in Optic Clear glass creates sparkling reflections, the version in Opal White glass completes the minimalistic Nordic look.

Liila 1 Wall/Ceiling works perfectly single or grouped in a decorative formation. Liila 1 also suits smaller rooms, the bathroom and the entrance hall.

Liila collection:

The Liila collection include the following products:

- Liila 1 Small Wall/Ceiling - Brass Optic/Opal
- Liila 1 Small Wall/Ceiling - Silver Optic/ Opal
- Liila 1 Medium Wall/Ceiling - Brass Optic/Opal
- Liila 1 Medium Wall/Ceiling - Silver Optic/ Opal
- Liila 1 Large Wall/Ceiling - Brass Optic/Opal
- Liila 1 Large Wall/Ceiling - Silver Optic / Opal
- Liila 12 Wall/Ceiling - Brass Optic/ Opal

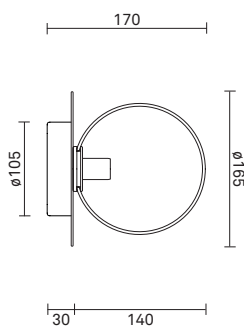

TECHNICAL INFO

Product no.: 04480323-1

Type: Wall Light - Indoor

Colour:

Glass: Optic Clear

Metal: Nordic Gold

Materials:

Powder coated metal

Mouth-blown glass

Dimensions:

ø165mm x 170mm

Product weight:

Product: 999 g

Packaging:

Dimensions: L: 338mm x W: 194mm x H: 175mm

Weight: 475 g

Total weight incl. product: 1474 g

Number of parcels: 1

Material: Brown cardboard.

Packaging - weight - material:

Cardboard outside: 187 g

Cardboard inside: 274 g

Bubble wrap: 6 g

Plastic bag: 8 g

Cleaning:

Use a soft dry cloth to clean the product.

Do not use household cleaners.

Certifications and labels:

CE - CE-certified

IP44 - IP44

□ - Class II

Light source:

Socket: G9

Max wattage: 7W LED (Bulb not included)

Voltage (V): 220-240V

Recommended light source:

Illumination G9 (344-07), 2.3W LED, 2700K, 180lm

Energy efficiency class:

A+ (with recommended bulb)

Dimmability:

Can be fitted with an aligned dimmer.

DALI compatible